



3. Technical Data:

- ① Rated Voltage: 398VAC (L-E) /690VAC (L-L) 1500VDC
- ② Operating Frequency: 0-60Hz
- ③ Rated Current: 4x250A
- ④ Insertion Loss: 100dB, 14kHz-40GHz
- ⑤ Climatic Category: 25/085/21

4. Assembly Parts:

- ① M72 Conduit Screw: 1pc
- ② Gasket 72: 1pc
- ③ M72 Screw Nut: 1pc
- ④ Cable Gland M75: 1pc
- ⑤ Certificate: 1pc

5. Typical Insertion Loss Performance Curve (acc. to MIL-STD-220)

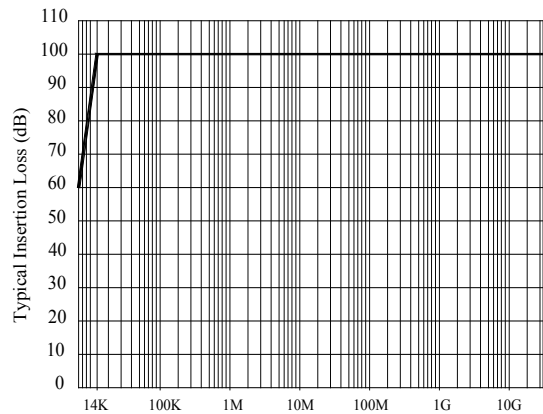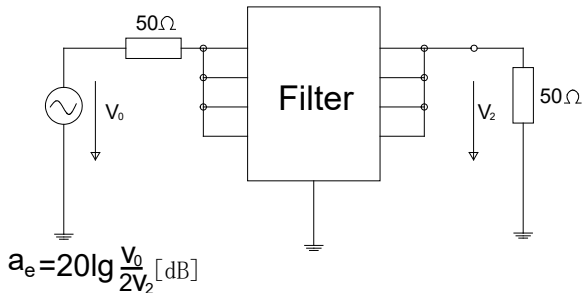

Frequency (Hz)
Asymmetric Performance in 50 ohm System
With or Without load

1) According to MIL-STD 285

6. Installation Diagram:

