


DATASHEET

(POWER LINE EMI FILTER, Type: TPF382A-32)

1. Type: TPF382A-32

2. Dimensions (mm):

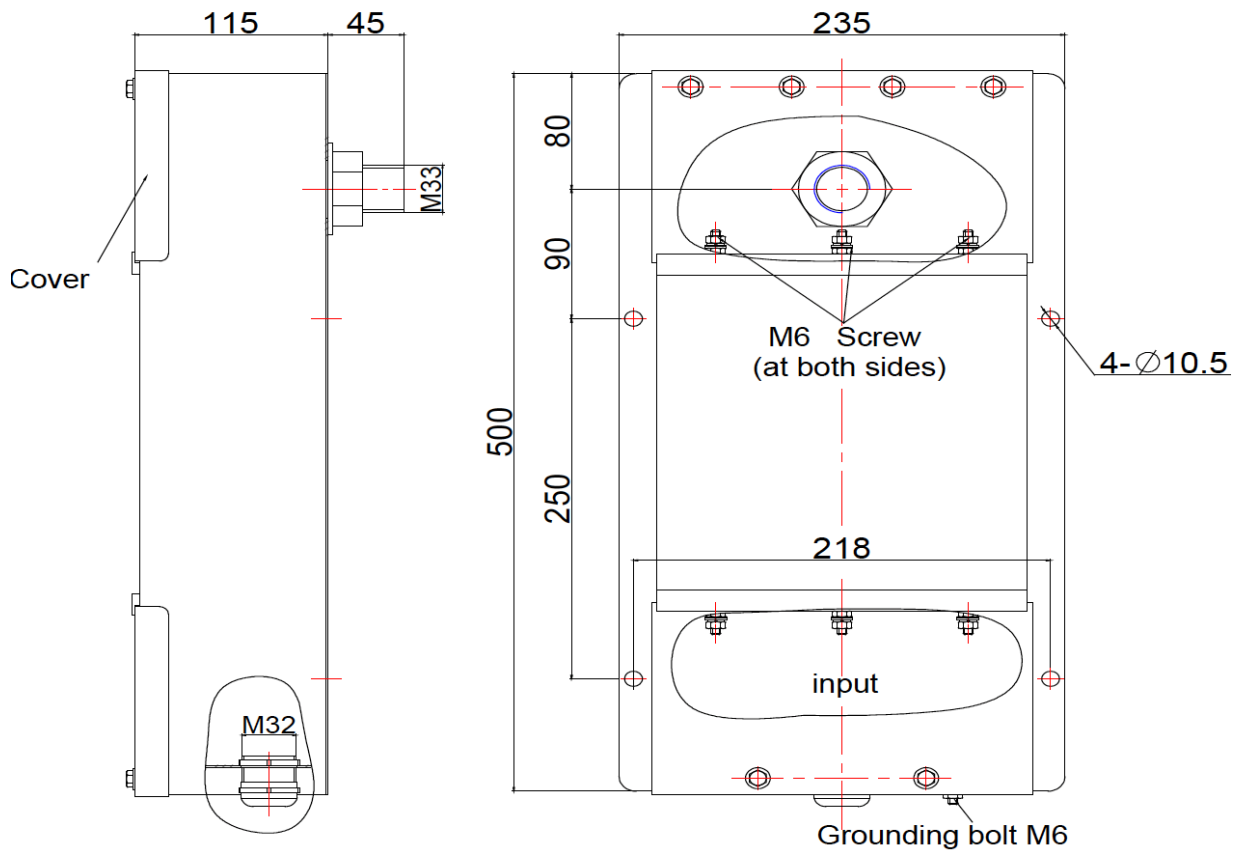

3. Net Weight :

12 kg



4. Technical Data:

- ① Rated Voltage: 440VAC/250VAC
- ② Operating Frequency: 0-60 Hz
- ③ Rated Current: 3 x 32 A
- ④ Insertion Loss: 100dB, 150kHz-40GHz
- ⑤ Climatic Category: 25/085/21

5. Assembly Parts:

- ① M33 Conduit Screw: 1pc
- ② Gasket 33: 1pc
- ③ M33 Screw Nut: 1pc
- ④ EMI Gasket 33: 1pc
- ⑤ Cable Gland M32: 1pc
- ⑥ Certificate: 1pc

6. Typical Insertion Loss Performance Curve (acc. to MIL-STD-220):

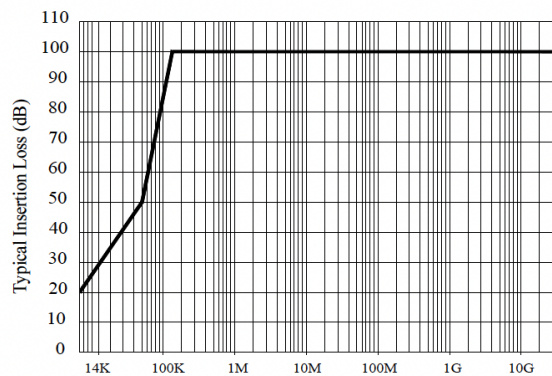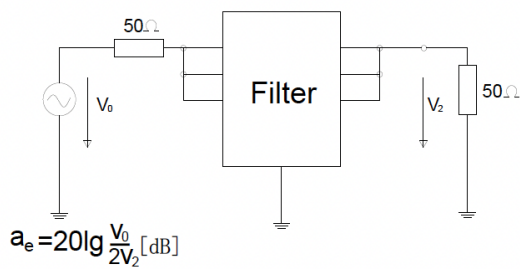

Frequency (Hz)
Asymmetric Performance in 50 ohm System
With or Without load

1) According to MIL-STD 285

7. Installation Diagram:

